

Powered by



6FM28 12V28Ah

6FM28 is a general purpose battery up to 5 years in standby service or more than 260 cycles at 100% discharge incycle service. As with all baykee batteries, all are rechargeable, highly efficient, leak proof and maintenance free.



► Specification

Cells Per Unit	6
Voltage Per Unit	12
Capacity	28Ah @ 20hr-rate to 1.8V per cell @25°C (77°F)
Weight	Approx. 8 kg(17.6 lbs)
Maximum Discharge Current	700A(5sec)
Internal Resistance	Approx. 6 mΩ
Operating Temperature Range	Discharge: -15°C~50°C (5°F~122°F) Charge: -15°C~40°C(5°F~104°F) Storage:-15°C~40°C (5°F~104°F)
Nominal Operating Temperature Range	25°C±3°C (77°F±5°F)
Float Charging Voltage	13.5 to 13.8 VDC/unit Average at 25°C (77°F)
Recommended Maximum Charging Current Limit	8.4A
Equalization and Cycle Service	14.4 to 15.0 VDC/unit Average at 25°C (77°F)
Self Discharge	Baykee Batteries can be stored for more than 6 months at 25°C(77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter.
Terminal	Thread lead alloy recessed terminal to accept M5 bolt
Container Material	ABS(UL 94-HB) & Flammability resistance of (UL 94-V0) can be available upon request.



CTK20141211018




Baykee-manufactured **VRLA** (Absorbent **G**lass **M**at type) batteries are UL-recognized components under UL1989.

Baykee is also certified by ISO 9001 and ISO 14001.

► Dimensions :

Unit: mm Overall Height (H) Container height (h) Length (L) Width (W)

Unit: mm 189±2 175±2 166±1.5 126±1.5

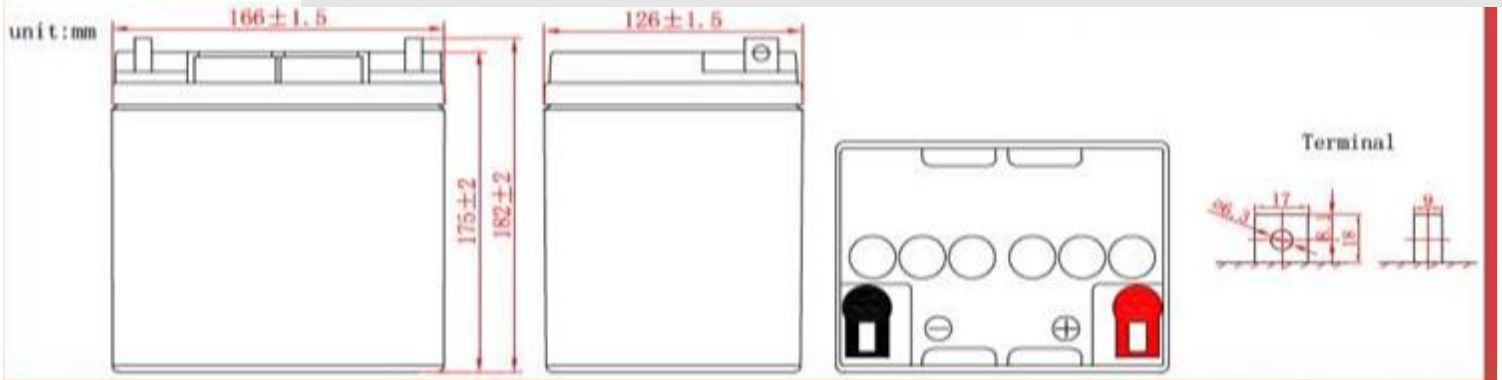

Constant Current Discharge Characteristics Unit:A (25°C, 77°F)


F.V/Time	5min	15min	30min	1h	3h	5h	10h	20h
1.60V	91.3	51.7	29.70	16.42	7.07	4.76	2.66	1.428
1.67V	89.5	50.8	29.51	16.27	7.04	4.73	2.65	1.422
1.7V	86.9	49.3	29.14	16.04	7.00	4.67	2.64	1.414
1.75V	82.3	47.0	28.49	15.62	6.92	4.58	2.62	1.400
1.8V	73.7	43.3	27.31	14.85	6.68	4.42	2.54	1.369
1.85V	57.2	36.6	25.27	13.62	6.19	4.12	2.41	1.316

Constant Power Discharge Characteristics Unit:W (25°C, 77°F)


F.V/Time	5min	15min	30min	1h	3h	5h	10h	20h
1.60V	156.1	99.4	57.4	31.21	13.94	9.28	5.24	2.83
1.67V	148.9	94.2	57.1	30.96	13.86	9.25	5.22	2.83
1.7V	139.1	88.1	56.6	30.60	13.78	9.17	5.19	2.81
1.75V	125.7	80.6	55.4	30.05	13.61	9.01	5.13	2.78
1.8V	107.7	71.3	53.2	29.06	13.16	8.69	4.98	2.72
1.85V	83.9	59.9	49.2	27.07	12.32	8.20	4.76	2.62

Ratings presented herein are subject to revision without notice. Please refer to www.baykee.com.pk to confirm the latest version.


Trickle(or Float)Design Life

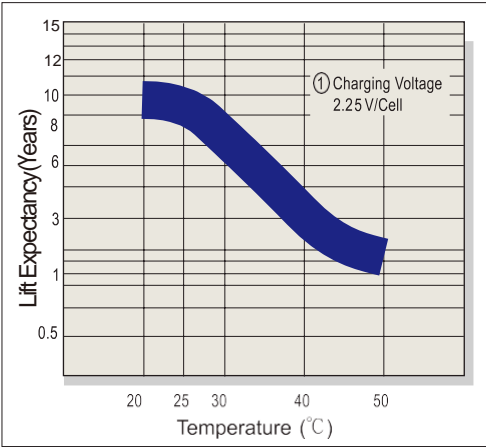


Capacity Retention Characteristic

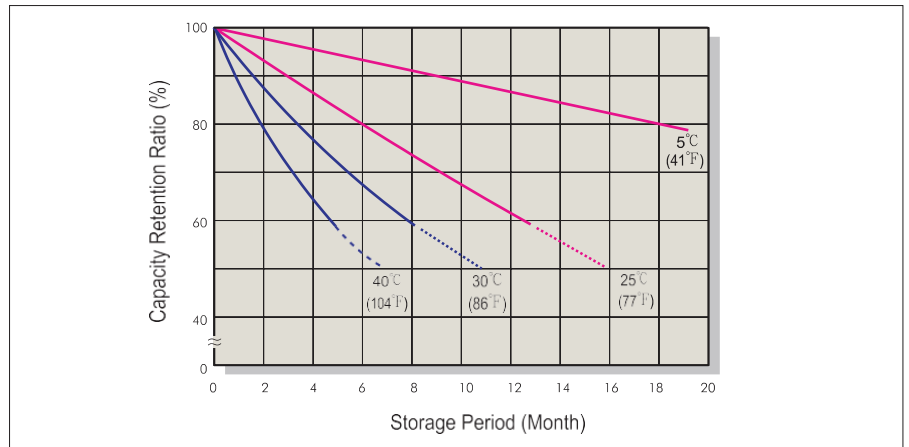


Battery Voltage and Charge Time for Standby Use

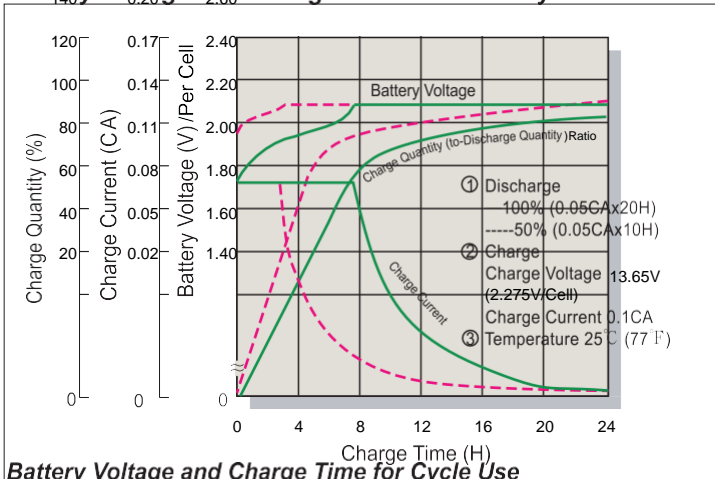


Cycle Service Life

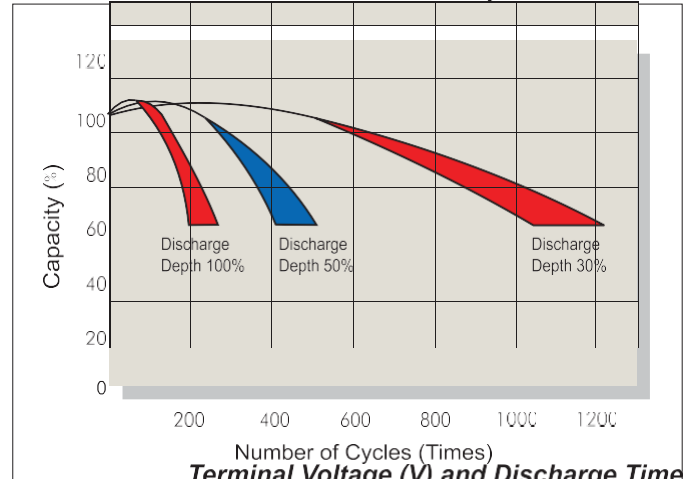

Battery Voltage and Charge Time for Cycle Use

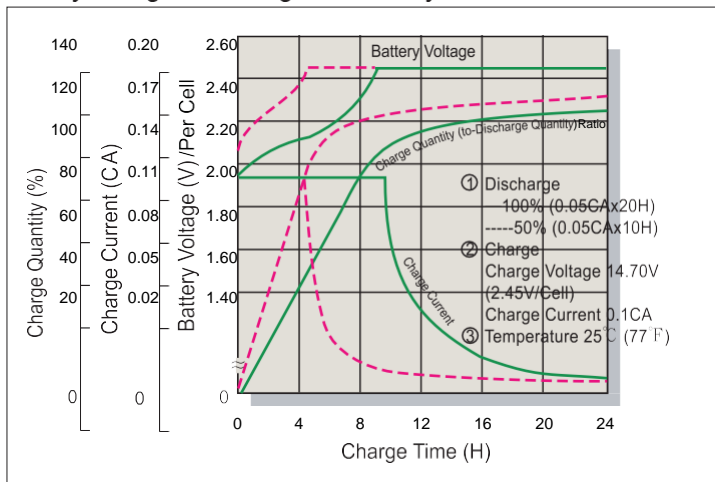

Terminal Voltage (V) and Discharge Time

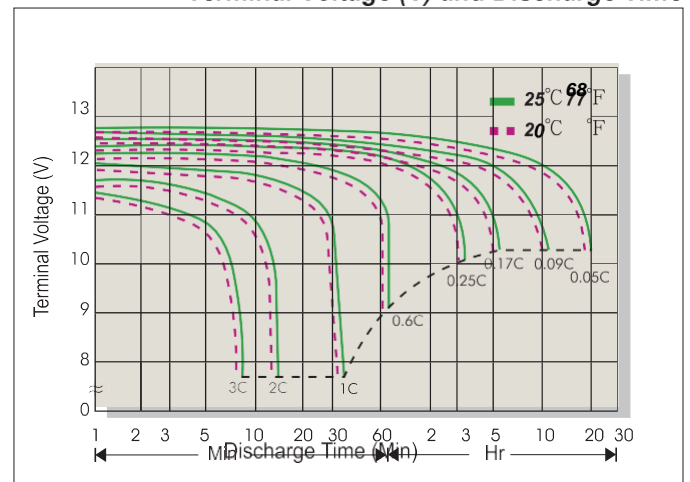

Charging Procedures

Application	Charge Voltage(V/Cell)		Max.Charge Current
	Temperature	Set Point Allowable Range	
Cycle Use	25(77°F)	2.45 2.40~2.50	0.3C
Standby	25(77°F)	2.275 2.25~2.30	

Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/Cell	1.75	1.70	1.65	1.60
Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C

Effect of temperature on capacity (10HR)

Temperature	Dependency of Capacity(10HR)
40°C	102%
25°C	100%
0°C	85%
-15°C	65%

Self-discharge Characteristics

Storage time	Preservation rate
3 Months	91%
6 Months	82%
12 Months	64%